




OBSERVATION ELEVATOR
WITH ALUMINIUM STRUCTURE






**TRACTION GLMRL TYPE
PANORAMIC ELEVATOR**

Plan of Hoistway and Machine room

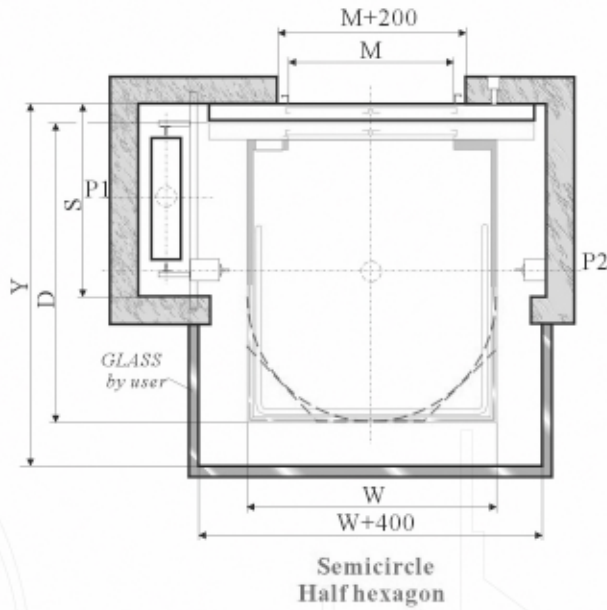

Hoistway Cutaway View

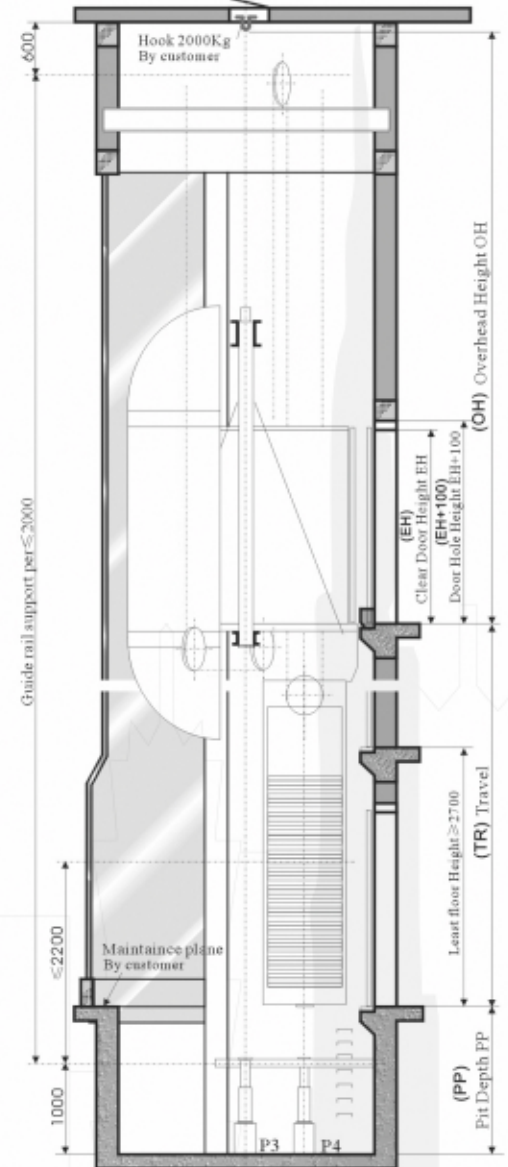

Speed m/s	Overhead mm OH	Pit mm PP
0.5-1.0	4600	1800
1.5-1.75	4800	2000

Machine Roomless Panoramic Elevator Specification

Type: RLOF-JVF, RLOF-JWVF

Speed m/s	rated capacity		Car outside size			Hoistway			Door opening		Building Capacity point			
	Load Kg	Persons	mm			mm			mm		P1 KN	P2 KN	P3 KN	P4 KN
			Width W	Depth D	Height D	Width X	Depth Y	S	Width M	Height EH				
0.5-1.0 1.5-1.75	450	6	1100	1400	2300	1900	1800	1050	700	2100	39.5	22	44	36
	630	8	1400	1800	2300	2200	2250	1050	800	2100	45	27.5	54	42
	800	10	1500	1900	2300	2300	2350	1250	800	2100	50	31	64	47
	1000	13	1600	2000	2300	2450	2450	1250	900	2100	60.5	47.5	75	55.5
	1250	16	1700	2100	2300	2600	2550	1250	1000	2100	90	69	93	68
	1600	21	2000	2200	2300	2950	2650	1450	1100	2100	115	87	117	85