





Hoistway Cutaway View  
Vertically bi-parting door

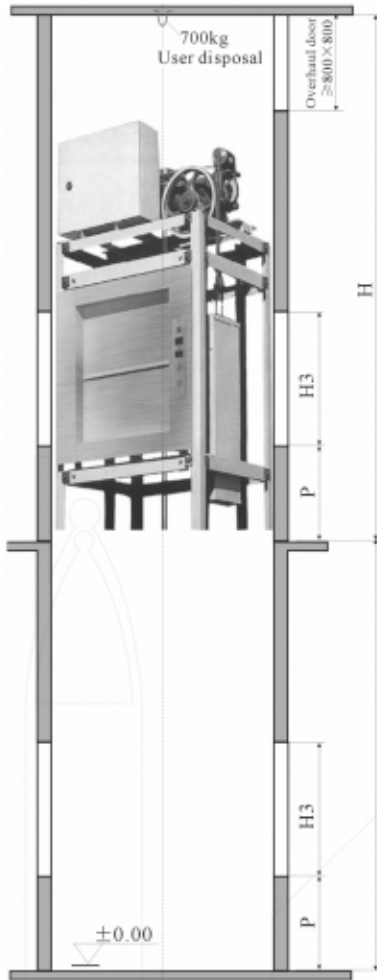


Windowsill Type

Hoistway Cutaway View  
Hinged Door

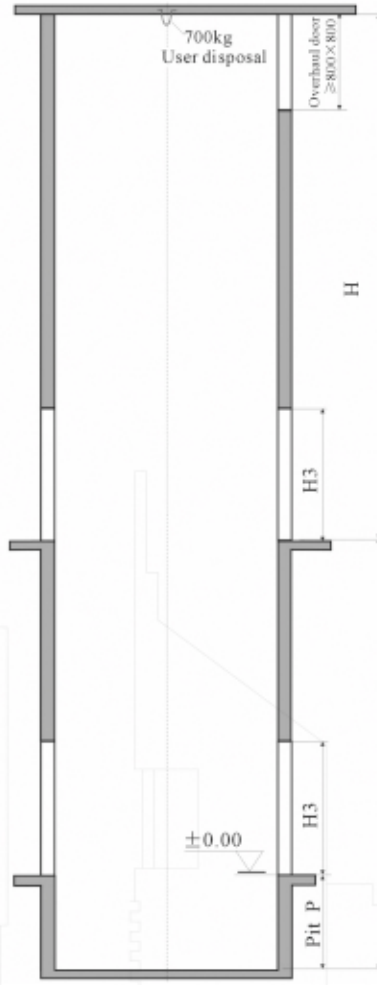


Pit Type ( Floor Type )

Plan of Hoistway and Machine room  
Door opening all in same line

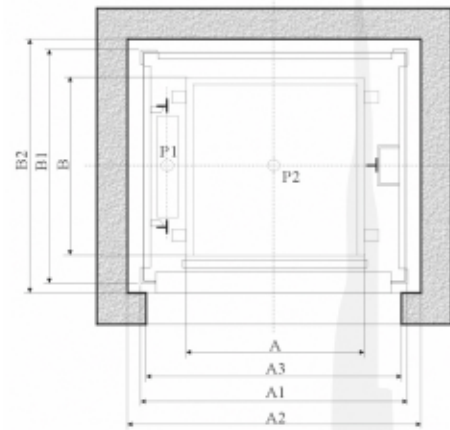

Plan of Hoistway and Machine room  
Door opposite opening

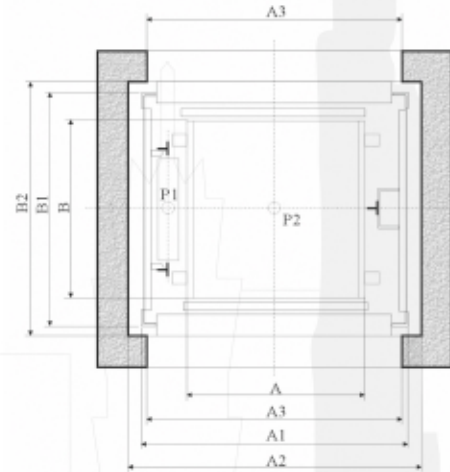

## Frame type Dumbwaiter Lift Specification

Type	Load Kg	Speed m/s	Car size mm			Hoistway mm		Door opening mm		Door hole mm		Overhead mm H	Platform mm P	Building Capacity point	
			Width	Depth	Height	Width	Depth	Width	Height	Width	Height			P1 N	P2 N
			A	B		A2	B2	A3	H3						
RLW-JVP-100/0.3W Windowsill Type	100	0.3	600	600	800	950	950	600	800	750	1000	≥3000	600	15000	9000
RLW-JVP-200/0.3W Windowsill Type	200	0.3	700	700	800	1050	1050	700	800	850	1000	≥3000	600	21000	11500
RLW-JVP-200/0.3P Pit Type	200	0.3	800	800	800	1120	1120	800	800	950	1000	≥3000	600	21000	11500
RLW-JVP-300/0.3P Pit Type	300	0.3	900	900	1000	1250	1200	900	1000	1160	1250	≥2800	≥500	21000	11500
RLW-JVP-300/0.3P Pit Type	300	0.3	1000	1000	1170	1650	1300	1000	1170	1260	1420	≥3000	≥500	27500	14000
RLW-JVP-500/0.3P Pit Type	500	0.3	1000	1250	1400	1650	1510	1000	1400	1260	1650	≥3200	≥500	40000	19300